

**Single Phase 0.5Amp Glass passivated Bridge Rectifiers**


**MBF**

**ROHS**  
COMPLIANT

**Pb**  
Pb-Free

**Features**

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Idea for printed circuit board
- Glass passivated junction chip
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed  
260°C/10 seconds at terminals

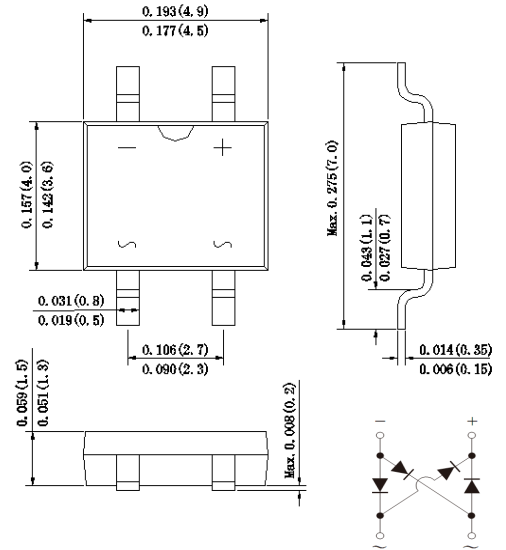

Dimensions in inches and (millimeters)

**Mechanical Data**

- Case :** Molded plastic body
- Terminals :** Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity :** Polarity symbol marking on body
- Mounting Position :** Any
- Weight :** 0.0027 ounce, 0.078 grams

**Maximum Ratings And Electrical Characteristics**

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	B05F	B1F	B2F	B4F	B6F	B8F	B10F	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum average forward rectified current at $T_L=100^\circ\text{C}$ On glass-epoxy P.C.B (Note 1)	$I_{(AV)}$	0.5							A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	25.0							A
Rating for fusing ( $t=8.3\text{ms}$ , $T_a=25^\circ\text{C}$ )	$I_t^2$	2.59							$A^2_s$
Maximum instantaneous forward voltage at 0.5A	$V_F$	1.0							V
Maximum DC reverse current $T_A = 25^\circ\text{C}$ at rated DC blocking voltage $T_A=125^\circ\text{C}$	$I_R$	2.0 200							$\mu\text{A}$
Typical junction capacitance (Note 2)	$C_J$	13.0							pF
Typical thermal resistance	$R_{qJA}$	76.0							$^\circ\text{C/W}$
Operating junction and storage temperature range	$T_J, T_{STG}$	-55 to +150							$^\circ\text{C}$

**Note:** 1. Mounted on glass epoxy PC board with 1.3\*1.3mm solder pad  
2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

**Single Phase 0.5Amp Glass passivated Bridge Rectifiers**

**Ratings And Characteristic Curves**

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

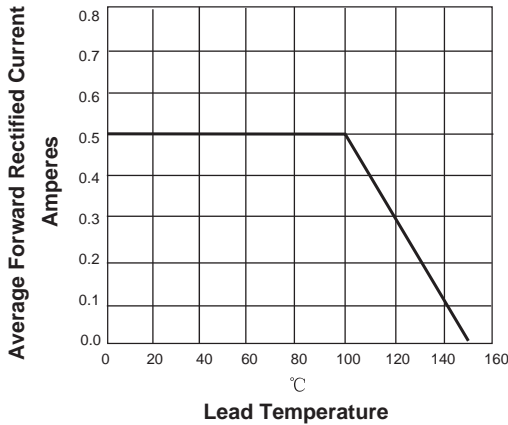


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

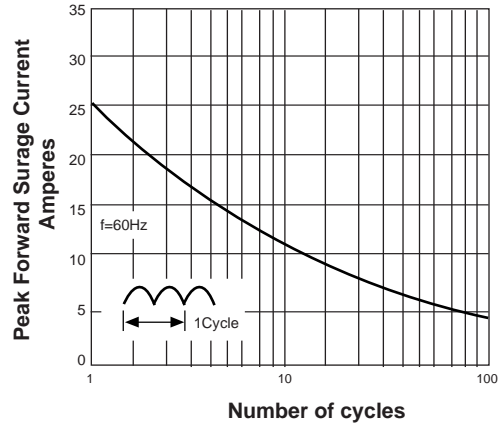


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS



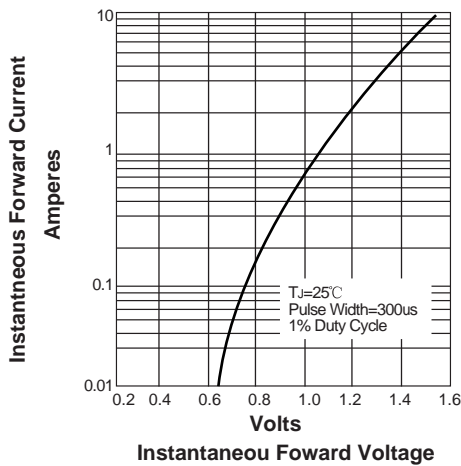


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

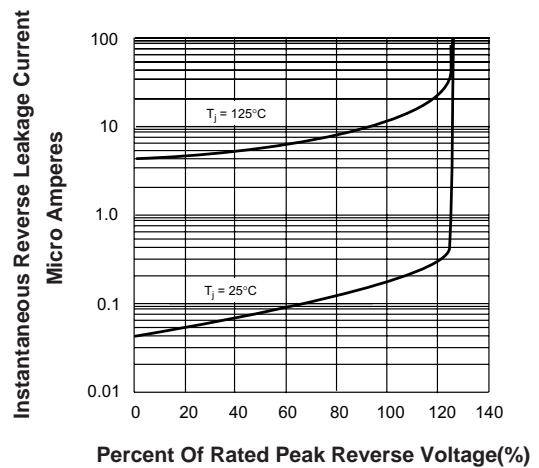


**Suggested Pad Layout**

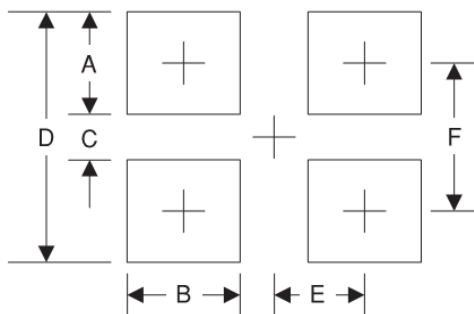

Symbol	Unit (mm)	Unit (inch)
A	1.7	0.067
B	1.0	0.039
C	4.40	0.173
D	8.10	0.319
E	1.25	0.049
F	6.30	0.248

**Single Phase 0.5Amp Glass passivated Bridge Rectifiers**

**Suggested Soldering Temperature Profile**

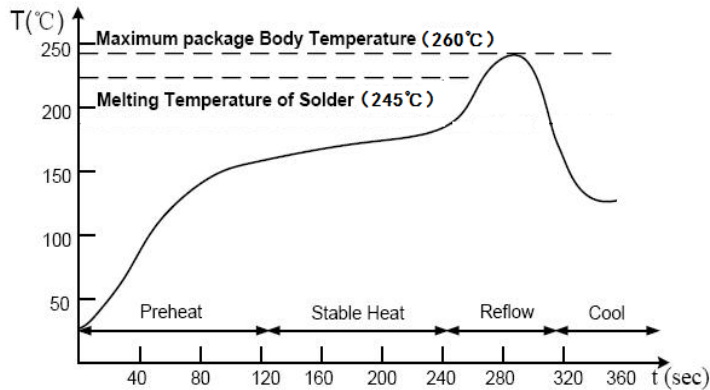


**Note**

- Recommended reflow methods: IR, vapor phase oven, hot air oven, wave solder.
- The device can be exposed to a maximum temperature of 260°C for 10 seconds.
- Devices can be cleaned using standard industry methods and solvents.
- If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

**Package Information**

**Carrier Dimension(mm)**

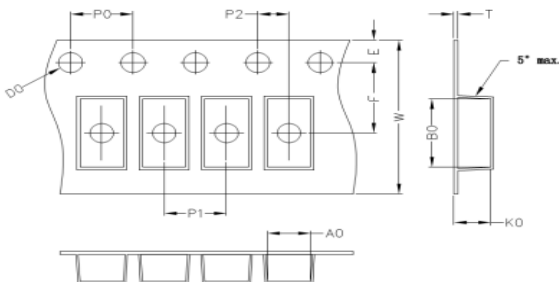

A0	B0	K0	D0	E	F
5.05	7.10	1.65	1.55	1.75	5.50
P0	P1	P2	T	W	Tolerance
4.0	8.0	2.0	0.25	12	0.1

**Package Specifications**

Package	Reel Size	Reel DIA. (mm)	Q'TY/Reel (Kpcs)	Box Size (mm)	QTY/Box (Kpcs)	Carton Size (mm)	Q'TY/Carton (Kpcs)
MBF	11'	278	3	280	6	355*310*310	48
	13'	330	5	338	10	365*365*360	80